




*India's Most Trusted CCTV Brand*

**UC-FHD 3200 VF L5 SY ST**

**2MP IR WATER-PROOF BULLET NETWORK CAMERA**




- 1080P real time image, high resolution, true color
- AHD/TVI/CVI/CVBS lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 5-50m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output

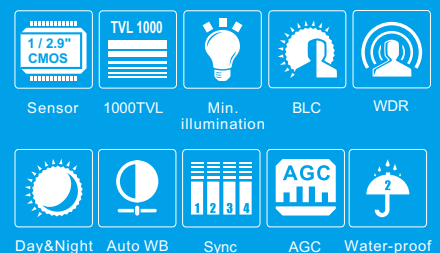

[www.unicamsystems.com](http://www.unicamsystems.com)


## 2 MP HD IR Water-proof Bullet Camera

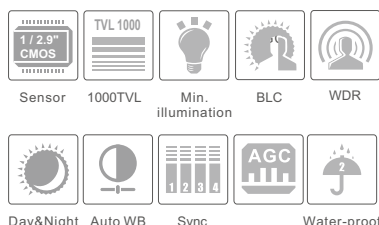

## Features

- 1080P real time image, high resolution, true color
- AHD/TVI/CVI/CVBS lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 5-50m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output

## Dimensions

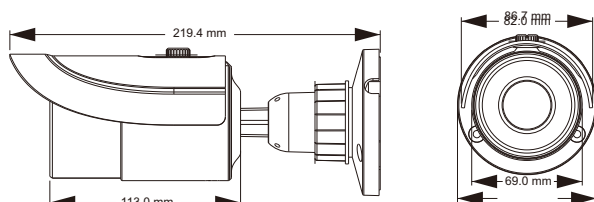

## Specifications

| Specifications           | UC-FHD 3200 L3 SY ST                                                   |
|--------------------------|------------------------------------------------------------------------|
| <b>Camera</b>            |                                                                        |
| Sony Sensor              | 1 / 2.9 "CMOS                                                          |
| Resolution               | 2MP                                                                    |
| Image Size               | 1920 x 1080                                                            |
| Video Output             | AHD / TVI / CVI / CVBS                                                 |
| Image System             | PAL / NTSC                                                             |
| Electronic Shutter       | Auto; 1 / 50s ~ 1 / 100000s ( PAL );<br>1 / 60s ~ 1 / 100000s ( NTSC ) |
| IR Distance              | 5 ~ 50 m                                                               |
| Frame Rate               | 30fps ( 60Hz ), 25fps ( 50Hz )                                         |
| Min. Illumination        | 0 Lux ( IR ON )                                                        |
| Lens                     | 2.8-12 mm                                                              |
| Lens Mount               | M12 and D14 optional                                                   |
| S / N Ratio              | ≥52dB ( AGC OFF )                                                      |
| Ingress Protection       | IP66                                                                   |
| <b>Functions</b>         |                                                                        |
| Function Control         | OSD ( COC Control )                                                    |
| Day & Night              | ICR                                                                    |
| Digital WDR              | Yes                                                                    |
| Digital NR               | Yes                                                                    |
| Global Exposure          | Yes                                                                    |
| Central Exposure         | Yes                                                                    |
| AGC                      | Yes                                                                    |
| Auto White Balance       | Yes                                                                    |
| BLC                      | Yes                                                                    |
| Front Light Compensation | Yes                                                                    |
| Sharpness                | Yes                                                                    |
| Smart IR                 | Yes                                                                    |
| Image Setting            | Yes                                                                    |
| Defect Correction        | Auto                                                                   |
| Language                 | Chinese / English                                                      |
| Angle Adjustment         | Any angle                                                              |
| <b>Others</b>            |                                                                        |
| Power Supply             | DC12V ( ± 10% )                                                        |
| Power Consumption        | Day : < 1W; Night : < 4W                                               |
| Working Environment      | - 20 °C ~ 50 °C, 10 % ~ 90 % ( relative humidity )                     |
| Dimensions ( mm )        | Φ87 x 219                                                              |