




India's Most Trusted CCTV Brand

UC-P425 S3L 2MP IR BULLET NETWORK CAMERA



- 2MP (1920 × 1080) H.265 coding
- Max.resolution: 1920 × 1080
- ICR auto switch, true day / night, ROI coding
- 3D DNR, digital WDR, HLC, BLC, defog
- 20~30m IR night view distance
- P2P function optional
- PoE power supply optional
- IP 67 ingress protection
- Support dual streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics: video blur detection, line crossing detection and region intrusion detection

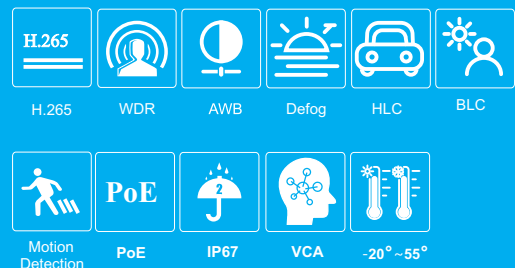

www.unicamsystems.com

SPECIFICATIONS

Specifications	Model	UC-P425 S3L
Camera		
Image Sensor		1 / 3.2 "CMOS
Image Size		1920×1080
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Iris Type		Fixed Iris
Min. Illumination		0.012lux @F1.2, AGC ON; 0 lux with IR 0.046 lux @ F2.0, AGC ON; 0 lux with IR
Lens		3.6 mm @F2.0, (fixed lens), horizontal field of view: 75.8° 6 mm @F2.0, (fixed lens), horizontal field of view: 46.7° 8 mm @F2.0, (fixed lens), horizontal field of view: 34.5°
Lens Mount		M12
Wide Dynamic Range		Digital WDR
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
Image		
Video Compression		Main stream: H.265 / H.264; Sub stream: H.265 / H.264/MJPEG;
H.265 Compression Standard		Main Profile@Leve4.1 High Tier
Resolution		1080P (1920 × 1080), 720P (1280 × 720), D1, 480 × 240, CIF
Main Stream		60Hz : 1080P/720P(1~30fps); 50Hz : 1080P/720P(1~25fps)
Sub Stream		60Hz : D1/CIF/480×240(1~30fps); 50Hz: D1/CIF/480×240 (1~25fps)
Bit Rate		64 Kbps ~ 6 Mbps
Bit Rate Type		VBR / CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Video Output		No
Audio		No
Storage		No
Hardware Reset		No
Functions		
Remote Monitoring		Web browsing,CMS remote control
Online Connection		Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol		ONVIF
Storage		Network remote storage
Smart Alarm		Motion detection
Intelligent Analytics		Region intrusion detection, video blur detection and line crossing detection
General Function		Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE		Optional
IR Distance		20 ~30m
Ingress Protection		IP67

Others	
Power Supply	DC12V(PoE power supply optional)
Power Consumption	< 6W
Operating Environment	- 20 °C ~ 55 °C (-4°F~131°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	144.6 × 85.8× 76.6
Weight (net)	Approx. 0.257KG
Installation	Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS
