




**UNICAM
SYSTEMS**
LEGITIMATE SECURITY GUARANTEED

India's Most Trusted CCTV Brand

UC-IPC1260 IR (DL)



DUAL LED

COLOR⁺

IP CAMERAS




*Built-in
Audio*

**6MP NETWORK
IR DOME CAMERA**

www.unicamsystems.com

6MP Network IR Water-proof Bullet Camera

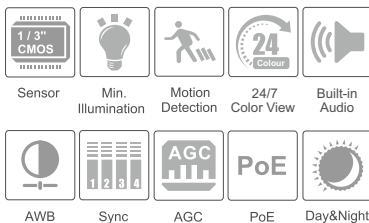

Unicam ColorPlus technology provides 24/7 vivid colorful images with F1.0 advanced lenses, high performance sensors and friendly lighting. F1.0 super-aperture collects more light to produce brighter images. Advanced sensor technology can vastly improve the utilization of available light. In zero-light scenarios, built-in, warm supplemental lighting works to guarantee colorful images.

Features

- 6MP (3072 x 2048) coding
- Max. resolution: 3072 x 2048
- ICR auto switch, true day / night
- 20-30m IR night view distance
- 10~20m white light view distance
- 3D DNR, digital WDR, ROI coding
- PoE power supply
- Smart analytics (optional): abnormal video signal detection, intrusion detection and line crossing detection
- Support smart phone, iPad, remote monitoring
- P2P function optional
- Support three streams
- Built-in microphone for real-time audio security
- 24/7 colorful imaging

Specifications

Specifications	Model	UC-IPC1260 IR (DL)
Camera		
ImageSensor		1 / 3 "CMOS
ImageSize		3072 x 2048
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Auto Iris		Fixed Iris
Min. Illumination		0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Light
Lens		3.6 mm @ F2.0, horizontal field of view : 72° (2.8 mm optional)
LensMount		M12
Day & Night		ICR Digital WDR
Wide Dynamic Range		Hardware WDR
Digital NR		3D DNR
Angle Adjustment		Any angle
Audio		In-Built Audio
Illuminator		
White Light Range		20m
IR Range		30m
Smart Supplement Light		Yes
Image		
Video Compression		H.264 / H.265 / H.265+
H.264 Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		6MP (3072 x 2048), 5MP (2592 x 1944), 4MP (2560 x 1440), 3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720)
Main Stream		60Hz : 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
BitRate		128 Kbps ~ 6 Mbps
EncodeMode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
ImageSettings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
Interfaces		
Network		RJ45
Functions		
RemoteMonitoring		IEbrowsing,CMSremote control
OnlineConnection		Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP
Interface Protocol		ONVIF
Storage		Network remote storage
SmartAlarm		Motion alarm
IRDistance		20-30m
Water-proof		NA
Others		
PowerSupply		DC12V / PoE
Power Consumption		< 5W
Operating Environment		- 20°C ~ 50 °C, 10% ~ 90% humidity
Dimensions (mm)		167.5 x 70.0 x 70.0
Weight (net)		320 g
Installation		Wall mounting, ceiling mounting