




India's Most Trusted CCTV Brand



Smart 4G Linkage Pan-Tilt Camera

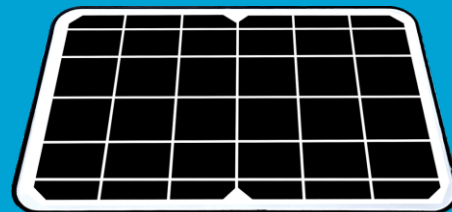

FEATURES

- 4MP + 4MP (2688 x 1520) Resolution
 - All Time Color Vision
 - Full Duplex Audio Intercom
(Built-in High Sensitivity Mic & Speaker)
 - Horizontal Rotation: 350°, Vertical Rotation: 90°
 - Dual Monitoring - One Camera for wide angle monitoring and one for PT detailed monitoring
 - Support 10x Digital Zoom
 - 6 Preset Points for favorite location
 - Smart Human Detection, Motion Detection, Human Tracking
 - Mobile Notification on Human & Motion Detection
 - Customized Pre-recorded Voice Alarm
 - Active defence and siren light
 - Support Micro SD Card upto 256GB & Cloud Storage(Optional)
 - QR Code Scanning for Network Connection
 - Monitoring: Mobile/PC Software (EseeCloud)
- IP66 Waterproof Rating, 4000 Lightning Protection.
Alexa Support

UC-4G-4M-SLR-LK (PL)

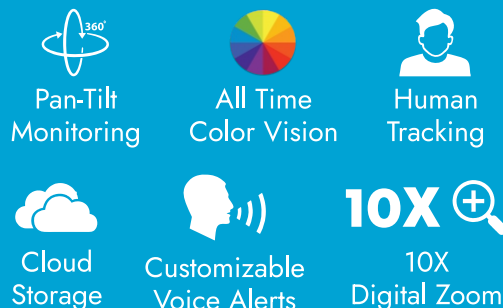

Technical Specification

Product Model	: UC-4G-4M-SLR-LK (PL)
Image Sensor	: 1/2.9" CMOS Sensor
Resolutions	: 4MP + 4MP (2688 x 1520)
Lens	: Bullet: 4mm Fixed + Pan-Tilt Dome: 8mm Fixed
IR LED	: Bullet: 6 Pcs Pan-Tilt Dome: 12 Pcs
IR Distance	: 30 Meters
White LED	: Bullet: 6 Pcs Pan-Tilt Dome: 12 Pcs
White LED Distance	: 20 Meters
Video Compression Standard	: H.264/H.265/H.265+
Video Streaming	: Main Stream: 2688 x 1520 / 15 fps Sub Stream: 800 x 896/15 fps
Audio Input/Output	: Two way audio, Built in microphone and speakers
Audio Compression Standard	: AAC/G711A
Protocol	: NI/Onvif
Connectors	: RJ45 LAN connector (100 Mbps) and DC Power Input
Pan-Tilt Angle	: Pan: 0° - 350°, Tilt: 0° - 90° Horizontal speed 20°/S, Vertical Speed 10°/S
Zoom	: 10x Combined Zoom
Light Mode	: Full Color / Infrared / Intelligent
DNR	: 3D Digital Noise Reduction
Day & Night	: IR-cut Auto ICR
Min Illumination	: Color: 0.01 Lux, Black & White: 0.001 Lux
White Balance	: Auto
WDR	: D-WDR
Mirror/Flip	: On / Off
Electronic Shutter	: Auto
Connection Mode	: 4G Sim Network
4G Frequency Band	: FDD-LTE: B1/B3/B5/B8; TDD-LTE: B34/B38/B39/B40/B41
Video Tuning	: Contrast, Brightness, Saturation, Sharpness adjustment.
On Screen Display (OSD)	: Date, Time, & Title
AI Features	: Motion Detection, Human Detection, Human Tracking.
Privacy Zone	: Support 4 Zone
Monitoring	: Andriod, iOS, Windows (EseeCloud)
Slots	: 4G Sim Card / Micro SD Card
Storage	: Support Micro SD Card upto 256GB & Cloud Storage (<i>Optional</i>)
Button	: Reset Button
Power Input	: DC: 12V/1A (DC 2.1mm Connector)

Technical Specification

Power Consumption : $\leq 15W$

Thunder Prevention : Standard IEC61000-4-5

Working Temperature / Humidity: $-10^{\circ}C$ to $50^{\circ}C$ / 30% to 80% RH

Storage Temperature / Humidity: $-20^{\circ}C$ to $60^{\circ}C$ / 20% to 90% RH

Housing Type : Plastic (IP66)

Dimension : 239mm X 142mm X 182mm (H x W x L)

Net Weight : 600 Gms

Gross Weight : 825 Gms

**Note: Product Specifications are subject to change without prior notice.*